


stern

STERN ENGINEERING LTD.

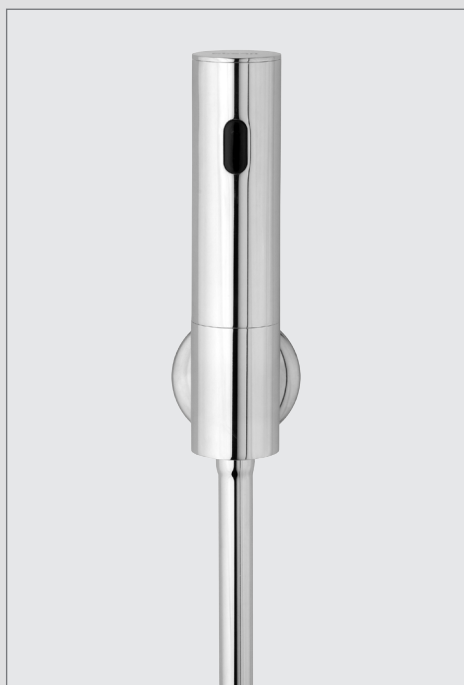

JUPITER 4000


ELECTRONIC FLUSH VALVE FOR URINAL

INSTALLATION AND MAINTENANCE GUIDE

INDEX

- 1 TECHNICAL DATA
- 2 PACK CONTENTS
- 3 PRE-INSTALLATION INFO
- 4-5 INSTALLATION
- 6-7 SETTINGS ADJUSTMENT
- 8 BATTERY REPLACEMENT
- 9 MAINTENANCE
 - Filters cleaning instructions
 - Care and cleaning of chrome and special finishes
- 10 SPARE PARTS LIST
- 11 LIMITED WARRANTY
- 12 TROUBLESHOOTING

TECHNICAL DATA

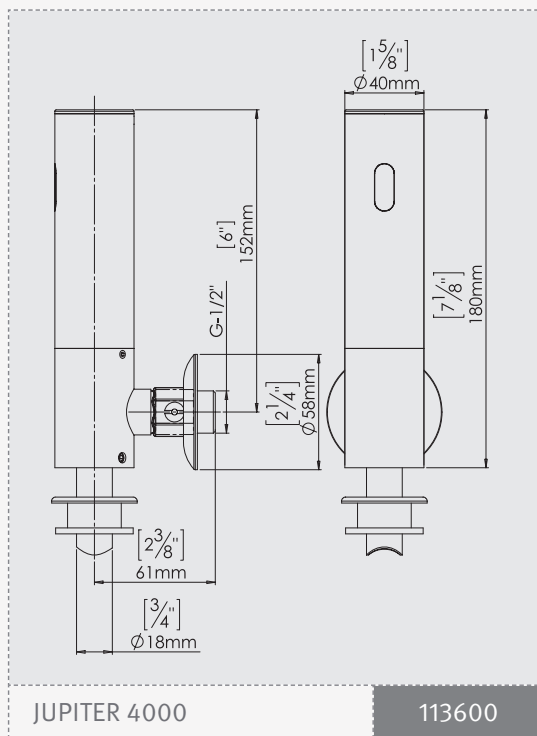


JUPITER 4000

113600

Power supply	Internally mounted 9V battery
Recommended water pressure	1-8 bar (14,5-116,0 PSI)
Preset sensor range	With water pressure of more than 8 bars, use a pressure reducing valve for reduction.
Minimum sensor range	600 mm. Adjustable
Maximum sensor range	300 mm
24 hour automatic flush	800 mm
Preset flushing time	Maintains trap seal every 24 hours when not used.
Prior use flush mode	6 secs. Adjustable
	Optional feature

PACK CONTENTS

Familiarize yourself with the part names and confirm that the parts are included:

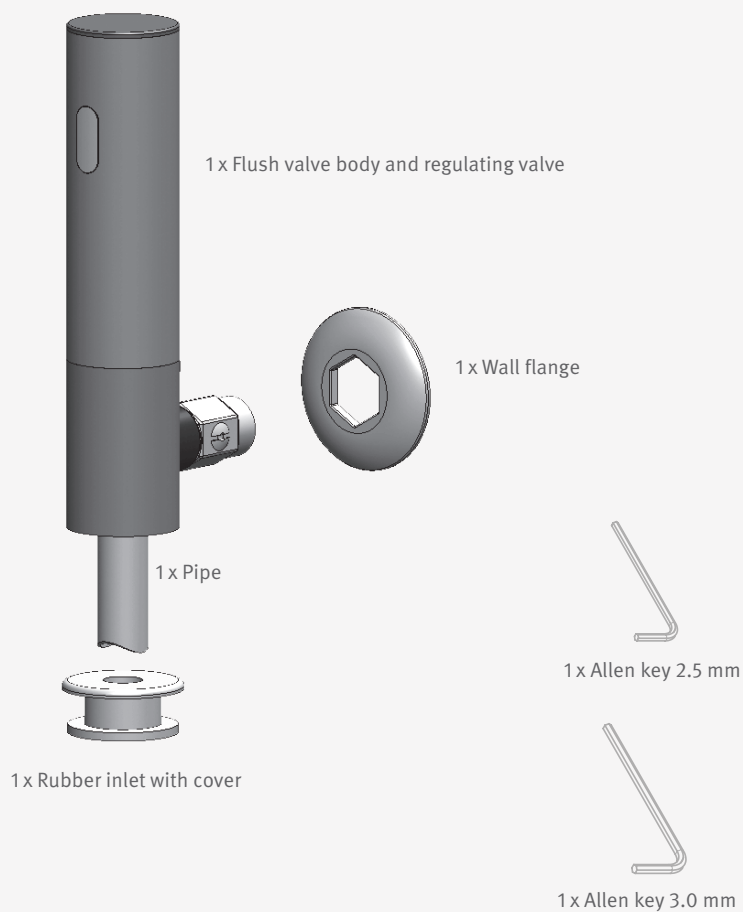

PRE-INSTALLATION INFO

Check contents

Separate all parts from the packaging and check each part with the “Pack contents” section.

Pay attention to the different models variations.

Make sure all parts are accounted for before discarding any packaging material.

If any parts are missing, do not attempt to install your electronic product until you obtain the missing parts.

Warnings

Do not install facing a mirror or any other electronic system operated by an infrared sensor.

To prevent reflection problems, it is recommended to keep a minimum distance of 1.50 meters between the product and any other objects.

NOTE: Keep a minimum distance of 500mm between the upper surface of the bowl and the infrared sensor.

Preparation for installation

Flush water supply lines thoroughly before installing the product. Do not allow dirt, Teflon tape or metal particles to enter the water line.

Shut off water supply.

Important

All plumbing is to be installed in accordance with applicable codes and regulations.

INSTALLATION


1

Ensure that the central water supply has been turned off at the corner valve.



2


Install the flush valve on the wall connected to the mains water supply. Fit the wall flange between the inlet opening of the regulating valve and the surface of the wall.



NOTE: Use the sealing thread or Teflon tape to seal the screw thread connection.


3

Insert the inlet pipe and rubber seal into the opening in the urinal. Push the inlet pipe into the water outlet opening of the flush valve and tighten the locking screw

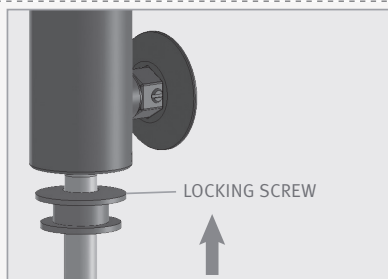

4


Turn on the mains water supply again and check the installation for leaks.



INSTALLATION

5

Ensure that the regulating valve is fully open by turning it anti-clockwise.

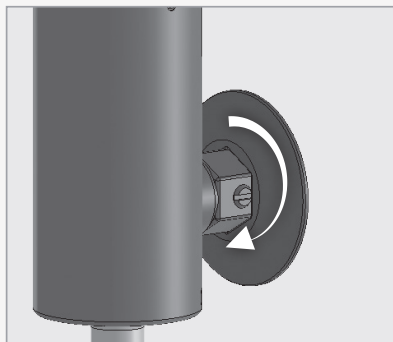

6

Remove the sticker that is covering the sensor. The battery is already connected and the flush valve is now operational.



IMPORTANT:

Carry out functional check. If the sensor coverage area is not adequate it can be readjusted following the procedure in the “Settings adjustment” section.

SETTINGS ADJUSTMENT



Adjusting the settings with the remote control

If necessary, the sensor settings can be adjusted as following:





Shut off the water supply. In order to adjust the sensor with the remote control, hold the remote control straight in front of the sensor in a distance of about 6-8" (15- 20cm). Choose the function you want to adjust by pressing once on one of the function buttons. After pressing once on a specific function button, a quick flashing of the red light at the front of the sensor will occur. At this stage, you can change the setting by pressing the (+) or the (-) buttons,

Every push will increase or decrease one level. After finishing the adjustment, turn the water supply back on.

SETTINGS ADJUSTMENT

	DETECTION RANGE: The sensor range is the greatest distance that an object can be away from the sensor to activate the flush valve. The sensor is factory preset. To adjust the sensor range press + to increase detection range and – to decrease the detection range of the sensor.
	FLOW TIME: This function determines the water flushing time once the user leaves the urinal. Press the two waves button. Wait until a quick flashing of the red light of the sensor eye is perceived. Then, press + to increase the flow time and – to reduce it.
	DELAY IN TIME: If required, the delay in time can be modified as follows: Press the IN button. Wait until a quick flashing of the red light of the sensor eye is perceived. Then, press + to increase the delay in time and – to reduce it.
	DELAY OUT TIME: This button changes the time interval the water starts to flush after the user has left the urinal. If required, the delay out time can be modified as follows: Press the OUT button. Wait until a quick flashing of the red light of the sensor eye is perceived. Then, press + to increase the delay out time and – to reduce it.
	24 HOUR HYGIENE FLUSH: If you have a compatible model with a 24 hours hygiene flush it is possible to enable and disable it. To activate the hygiene flush, press the clock button. Wait until a quick flashing of the red light of the sensor eye is perceived. Then press + to activate the hygiene flush or – to deactivate it.
	TEMPORARY OFF FUNCTION: This function is ideal to perform any kind of activity in front of the sensor without operating the system (for example, cleaning). Urinals will remain shut for 1 minute when this button is pressed once. To cancel this function and to return to normal operation press the On/Off button again or wait 1 minute.
	RESET BUTTON: This function allows the sensor to return to the original factory preset settings. If required, press the Reset button and without releasing it, press the + button once.

BATTERY REPLACEMENT

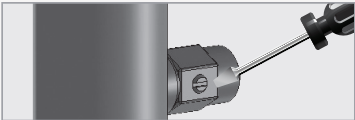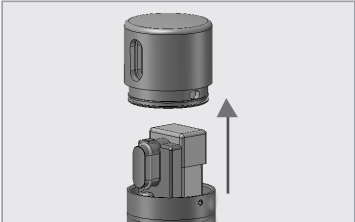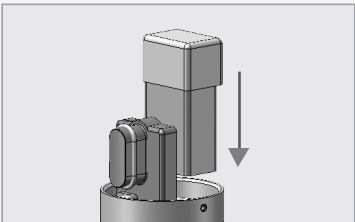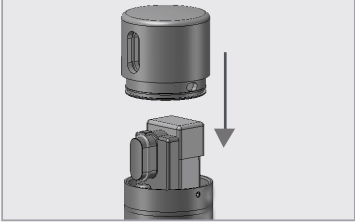1	Turn off the regulating valve	
2	Unscrew the cover of the electronics unit and remove it.	
3	Replace the old battery with a new 9V battery (lithium battery recommended).	
NOTE: Check that the outer O-ring is not damaged. Replace the O-ring if necessary. ATTENTION: Dry the inside of the cover and interior of the flush valve body carefully. The interior of the flush valve body and the cover plate with the electronic cap must be fully dry before reassembling the parts.		
4	Replace the electronic unit cover and screw it tight. Open the regulating valve once again.	

IMPORTANT: Spent batteries should not be disposed of with normal household waste. Contact your local authority for information on waste disposal and recycling.



MAINTENANCE

Filter cleaning instructions

This flush valve is provided with a stainless steel filter preventing foreign particles from entering the lines. If the water flow has decreased, this may be because the filter is clogged. The filter can be cleaned as follows:

1. Shut off the regulating valve.
2. Disassemble the electronic flush valve from the regulating valve.
3. Remove the filter and wash it under running water.
4. Reassemble the filter.
5. Reassemble the electronic flush valve.
6. Turn on the regulating valve and adjust the flow capacity.
7. Make sure that there is no water leakage.

Care and cleaning of chrome and special finishes

DO NOT use steel wool or cleansing agents containing alcohol, acid, abrasives, or the like. Use of any prohibited cleaning or maintenance products or substances could damage the surface of the faucet. For surface cleaning of faucet use ONLY soap and water, then wipe dry with clean cloth or towel. When cleaning bathroom tile, the flush valve should be protected from any splattering of harsh cleansers.

SPARE PARTS LIST

10-Pack Sensor Kit	07220364
10-Pack Solenoid valve kit	07232000
Seals and screws kit	07210141
10-Pack Diaphragm	04500048
Remote control (optional)	07100005

LIMITED WARRANTY

Y. Stern Engineering Ltd. warrants that its electronic products will be free of defects in material and workmanship during normal use for two years from the date the product is purchased.

If a defect is found in normal use, Y. Stern Engineering Ltd. will, at its discretion, repair, provide a replacement part or product, or make appropriate adjustments. Damage caused by accident, misuse, or abuse is not covered by this warranty. Improper care and cleaning will void the warranty. Proof of purchase (original sales receipt) must be provided to Stern Engineering Ltd. with all warranty claims.

Stern Engineering Ltd is not responsible for labor charges, installation, or other incidental or consequential costs other than those noted above. In no event shall the liability of Stern Engineering Ltd. exceed the purchase price of the product.


If you believe that you have a warranty claim, contact your Stern Distributor, Dealer or Plumbing Contractor. Please be sure to provide all pertinent information regarding your claim, including a complete description of the problem, the product, model number, the date the product was purchased, from whom the product was purchased and the installation date. Also include your original invoice.

Y. STERN ENGINEERING AND/OR SELLER DISCLAIM ANY LIABILITY FOR SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES. This warranty excludes product damage due to installation error, incorrect maintenance, wear and tear, battery, product abuse, or product misuse, whether performed by a contractor, service company, or the consumer. This warranty does not cover product damage caused by the following:

- Incorrect installation.
- inversions of supply pipes.
- Pressures or temperatures exceeding recommended limits.
- Improper manipulation, tampering, bad or lapsed maintenance.
- Foreign bodies, dirt or scale introduced by the water supply or soap tank.
- Use of the soap outside of viscosity specifications.
- Alteration of the original soap/foam dispenser components (including pipes).

TROUBLESHOOTING

PROBLEM	INDICATOR	CAUSE	SOLUTION
Valve does not flush	1. Sensor flashes continuously when user steps within sensor's range.	Low battery.	Replace battery.
	2. Red light in the sensor does not flash when user steps within the sensor's range.	1. Range is too short.	Increase the range.
		2. Range is too long.	Decrease the range.
		3. Battery is completely used up	The battery must be replaced.
		4. Sensor is picking up reflections from the washbasin or another object.	Eliminate cause of reflection.
	3. Red light in the sensor flashes when user's hands are within the sensor's range.	1. Connectors between the electronic unit and solenoid are disconnected.	Connect the electronic unit connectors to the solenoid.
		2. Debris or scale in solenoid	Unscrew solenoid, pull out the plunger and the spring from solenoid, clean them with pressure or use scale remover material if needed.
		3. The central orifice in the diaphragm is plugged or the diaphragm is torn.	Clean the orifice or replace diaphragm.
		4. The water supply pressure is higher than 8 bar.	Reduce the supply water pressure.
Valve does not shut off:	1. Sensor flashes when user steps within the sensor's range.	Debris or scale in diaphragm or the diaphragm is torn.	Clean or eliminate cause of interference.
	2. Red light in the sensor does not flash when user steps within the sensor's range.	Sensor is dirty or covered.	



stern

STERN ENGINEERING LTD.

777 Passaic Avenue, Clifton NJ, 07012, USA

Tel: +1-973 773 8011 | Fax: +1-973-779-8768

Toll Free: 1-800-4364410

info@sternfaucets.com | tech@sternfaucets.com

